



www.temtaragri.com



TEM TAR
Agricultural machinery





TEMPTAR

Agricultural machinery



www.temtaragri.com





COMPANY PROFILE


Our company TEMTARAGRI was based in 1975. In a short time, past experiences, a wide assortment of products and successful realization of projects, it has achieved great success in the production of meadow mowers.

We as an agriculture company, focus on satisfying the needs of our customers, in addition we consult them about our products. To achieve the high quality of our products, we set highest quality standard in advance, and we do not deviate a single step from the established standard till the end of manufacturing. That's why TEMTARAGRI produces a wide range of quality products.

Our company pays special attention to the development of its employees in the professional sphere. Thus, bringing their work under high quality due to high quality standard, which insure our customers with contentment of products.

From the moment of our foundation for now, we work for our clients. TEMTARAGRI was founded under the motto "Excellent service and trust." This means that every day we work to earn the trust of our customers with our products.

The mission we have undertaken as an TEMTARAGRI is to produce high-quality, customer oriented products. Our main goal is growing with developing Turkey, and being responsible in the environment, as well as human values.

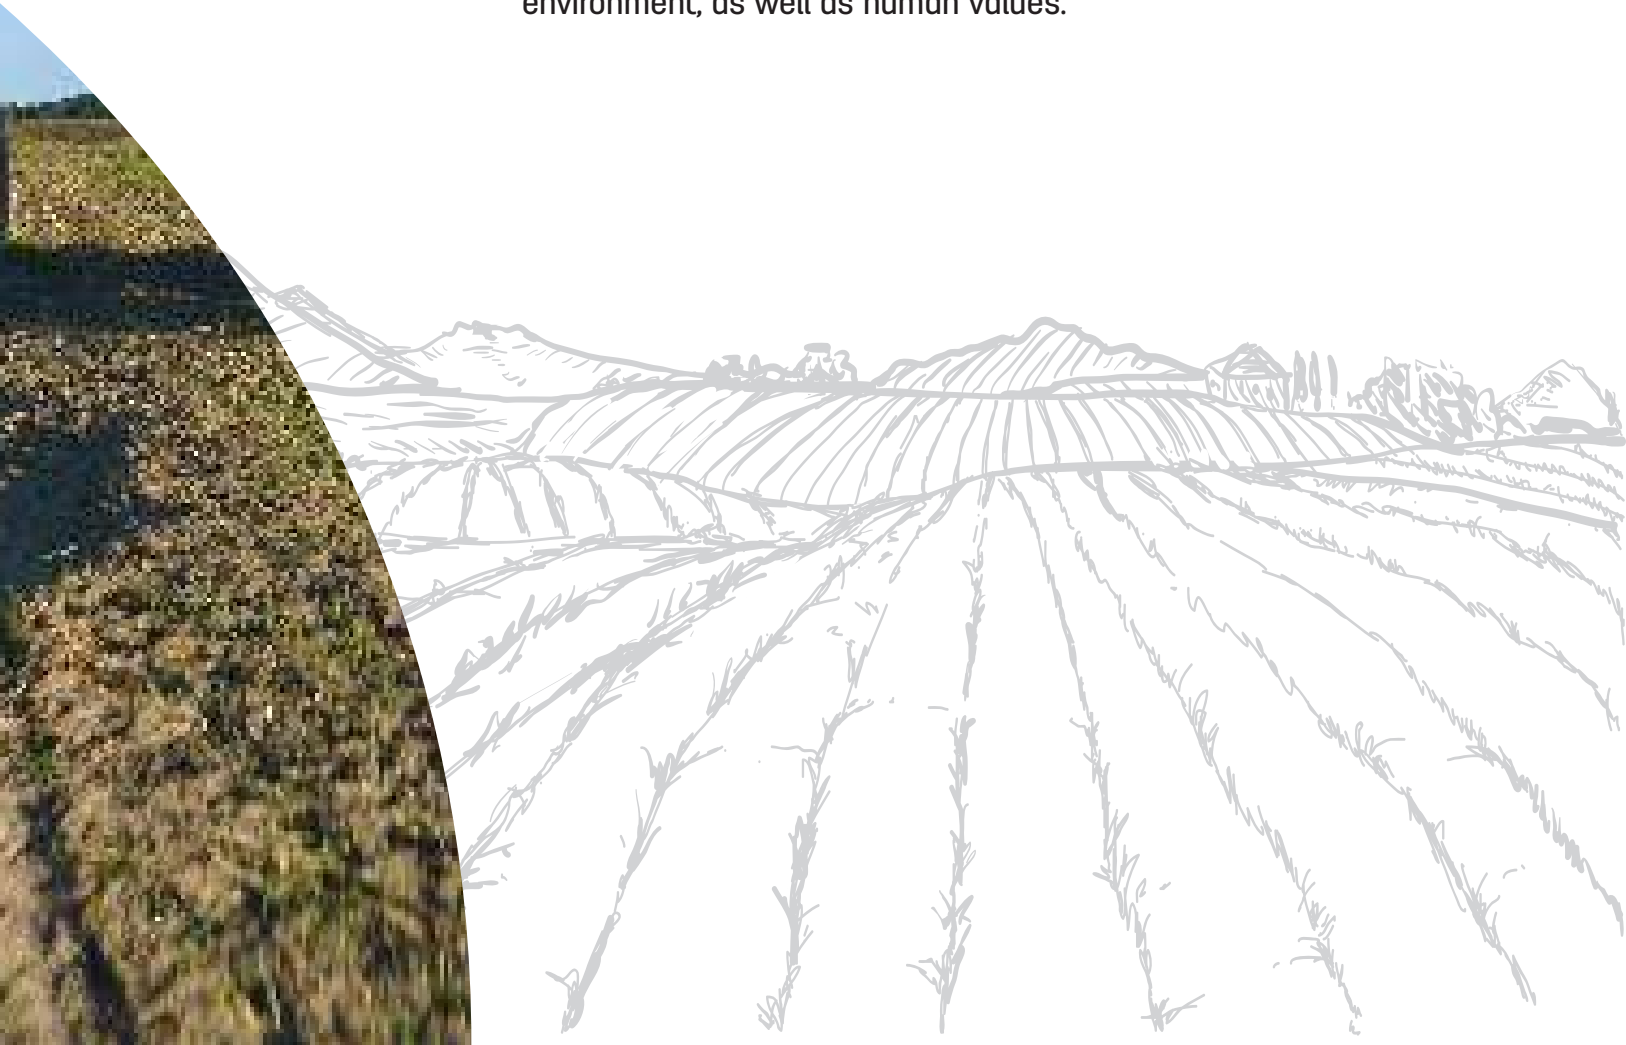






TEMPTAR
Agricultural machinery



BALER MACHINE

TA-155

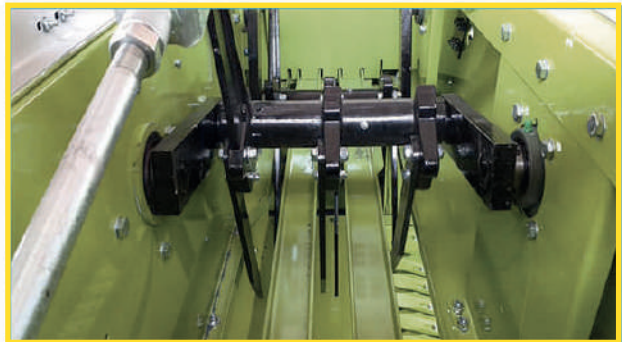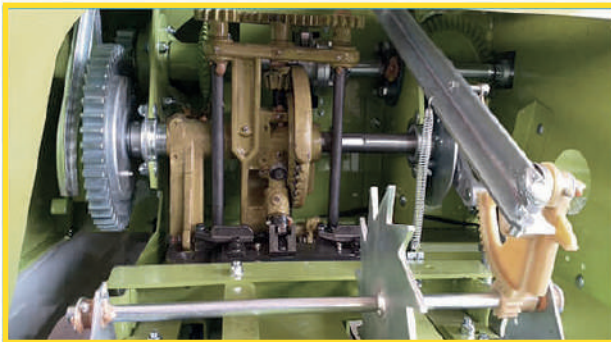



TECHNICAL SPECIFICATIONS

Lenght	5440 mm (Working Cond. 6370 mm)
Width	2520 mm
Height	1740 mm
Weight	1750 kg
Tire Size Right	10.0/75 - 15,3 PR
Tire Size Left	225/70R15
Daily Capacity	2000/3000 Pieces
Bale Size	30 x 135 cm
Bale Weight	20/35 kg
Power Requirement	45/50 HP
Piston Stroke	72 cm
Pick-up Inside Width	1535 mm
Connecting System	2 ropes






TEMTAR
Agricultural machinery



CORN HEADER

TA-165





TECHNICAL SPECIFICATIONS			
MODEL	TA-165-1	TA-165-2	TA-165-3
Number Of Rows	4	5	6
Distance (cm)	70	70	70
Height (cm)	140	140	140
Width (cm)	284	284	284
Width On Loading (cm)	245	245	245
Lenght	300	360	430
Weight (Kg)	1400	1850	2150







TEM TAR
Agricultural machinery



WIDE LEVEL DISC HARROW SESAME SEEDER

TA-185

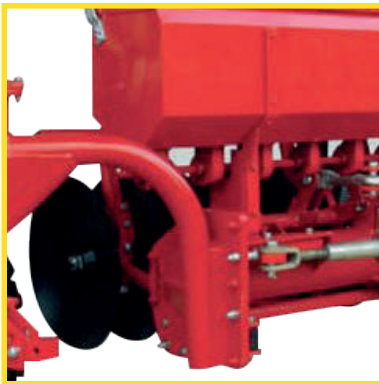




TECHNICAL SPECIFICATIONS			
MODEL	TA-185-024	TA-185-030	TA-185-036
Number Of Rows	24	30	36
Width	6500 Mm	7500 Mm	8500 Mm
Length	3700 Mm	3700 Mm	3700 Mm
Height	1240 Mm	1240 Mm	1240 Mm
Working Width	4100 Mm	5125 Mm	6150 Mm
Space Between Units	175 Mm	175 Mm	175 Mm
Seed Capacity	430 Lt	530 Lt	640 Lt
Working Speed	4-8 Km/S	4-8 Km/S	4-8 Km/S
Disc Diameter	510 Mm	510 Mm	510 Mm
Required Power	75-85 Hp	85-95 Hp	95-100 Hp
Weight	1230 Kg	1600 Kg	1980 Kg





622 REAPER BINDER


TA-195

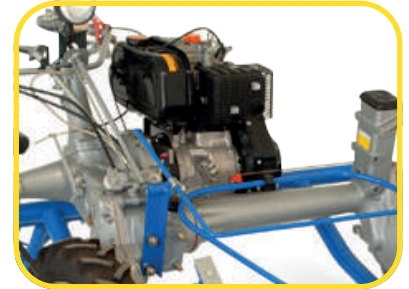

TECHNICAL SPECIFICATIONS


Power Supply	Diesel
Power (Hp)	12
Wheels	4.50 - 19
Machine Weight (Kg)	240
Working Width (cm)	140
Forward speed in km/h	I: 5,5 - II: 7,5 - III: 10 - IV: 14,2 - RM: 6
No. of gears	4+1





TA-205

622 MOWER

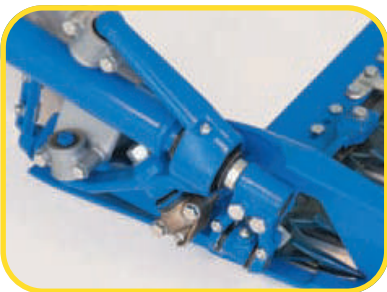

TECHNICAL SPECIFICATIONS

Power Supply	Diesel
Power (Hp)	12
Wheels	4.50 - 19
Machine Weight (Kg)	190
Working Width (cm)	140
Forward speed in km/h	I: 5,5 - II: 7,5 - III: 10 - IV: 14,2 - RM: 6
No. of gears	4+1






TECHNICAL SPECIFICATIONS

Size	140 cm	180 cm
Transport Position (mm)	3460	3600
Overall Width (mm)	1900	1900
The Height of Crop (mm)	700-1800	700-1800
Overall Height (mm)	1100	1100
Reaping Width (mm)	1400	1800

TECHNICAL SPECIFICATIONS

Size	140 cm	180 cm
Reaping Height (mm)	Adjustable	Adjustable
Capacity (da/h)	11	11
Machine Weight (Kg)	400	450
PTO (min/lt)	540	540
Requider Tractor Power (Hp)	45-55	45-55





TA-225

DRUM MOWER



TECHNICAL SPECIFICATIONS

Size	TA-225-1	TA-225-2	TA-225-3	TA-225-4
Working Width	125	145	165	195
Number Of Drum	2	2	2	2
Number Of Knives	6-8	6-8	6-8	6-8
Cutting Width	125 cm	145 cm	165 cm	195 cm
Transfer Of PTO	540 d/dak-rpm	540 d/dak-rpm	540 d/dak-rpm	540 d/dak-rpm
Drum Rotation	1920 d/dak-rpm	1920 d/dak-rpm	1920 d/dak-rpm	1920 d/dak-rpm
Tractor Power Supply	25 hp	25 hp	25 hp	25 hp
Weight	380 kg	380 kg	380 kg	380 kg





DOUBLE ACTION SICKLE BAR MOWER

TA-235



180
cm


205
cm

230
cm

TECHNICAL SPECIFICATIONS

Model	TA-235-1	TA-235-2	TA-235-3
Cutting Width	180 cm	205 cm	230 cm
Total Weight	220 Kg	240 Kg	260 Kg
Knife Quantity	24 Adet / Pieces	28 Adet / Pieces	32 Adet / Pieces
Finger Quantity	12 Adet / Pieces	14 Adet / Pieces	16 Adet / Pieces
Eccentric Period	1300 d/dak.	1300 d/dak.	1300 d/dak.
Average Knife Speed	3.29 m/s	3.29 m/s	3.29 m/s





TA-245

SINGLE ACTION SICKLE BAR MOWER



TECHNICAL SPECIFICATIONS

Cutting Width	1800 mm
Total Weight	180 Kg
Knife Quantity	25 Adet / Pieces
Finger Quantity	24 Adet / Pieces
Eccentric Period	1300 d/dak.
Average Knife Speed	3.29 m/s





CHICKPEA SEED DRILL


TA-255



TECHNICAL SPECIFICATIONS

Model	TA-255-1	TA-255-2	TA-255-3	TA-255-4
Size	9x1800	11x2200	13x2600	15x3000
Number Of Tines	9	11	13	15
Chickpeas Sowing Distance	200	200	200	200
Length At Park Position	2200	2800	3200	3400
Width At Park Position	1400	1400	1400	1400
Height At Park Position	1550	1550	1550	1550
Chassis Length	650	650	650	650
Working Length	1800	2200	2600	3000
Weigth	700	750	850	950





TA-265

SEED DRILL



TECHNICAL SPECIFICATIONS

Model	TA-265-1	TA-265-2	TA-265-3	TA-265-4	TA-265-5	TA-265-6	TA-265-7
Number Of Tines	12	14	16	18	20	22	24
Total Length (Mm)	2380	2650	2920	3190	3460	3730	4000
Total Planting Length (Mm)	1490	1750	2020	2290	2560	2830	3100
Total Planting Parking (Mm)	1300	1300	1300	1300	1300	1300	1300
Box Length	1780	2050	2320	2590	2860	3130	3400
Total Height	135	135	135	135	135	135	135
Total Capacity (Dm3)	250	310	325	365	405	445	485
Manure Capacity (Dm3)	185	220	250	280	310	340	370
Disc Range Between Planting (Mm)	135	135	135	135	135	135	135
Weight	710	760	820	880	940	1000	1160
Digging Depth Of Discs (Mm)	150	150	150	150	150	150	150






TEMTAR

Agricultural machinery




RIDGER


TA-275

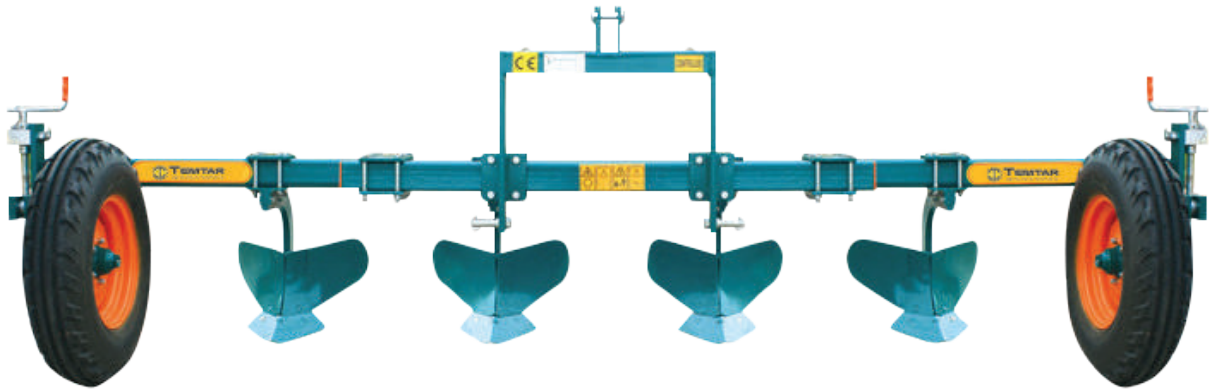

TECHNICAL SPECIFICATIONS


Length (CM)	400
Width (CM)	140
Height (CM)	95
Weight (KG)	475
Foot Pcs (CM)	4
Foot Depth (CM)	42
Working Depth (CM)	MAX 60 CM
2 Foot Between Distance (CM)	95
Tractor power (PH)	70-90
Tire Dimensions	7.50X16

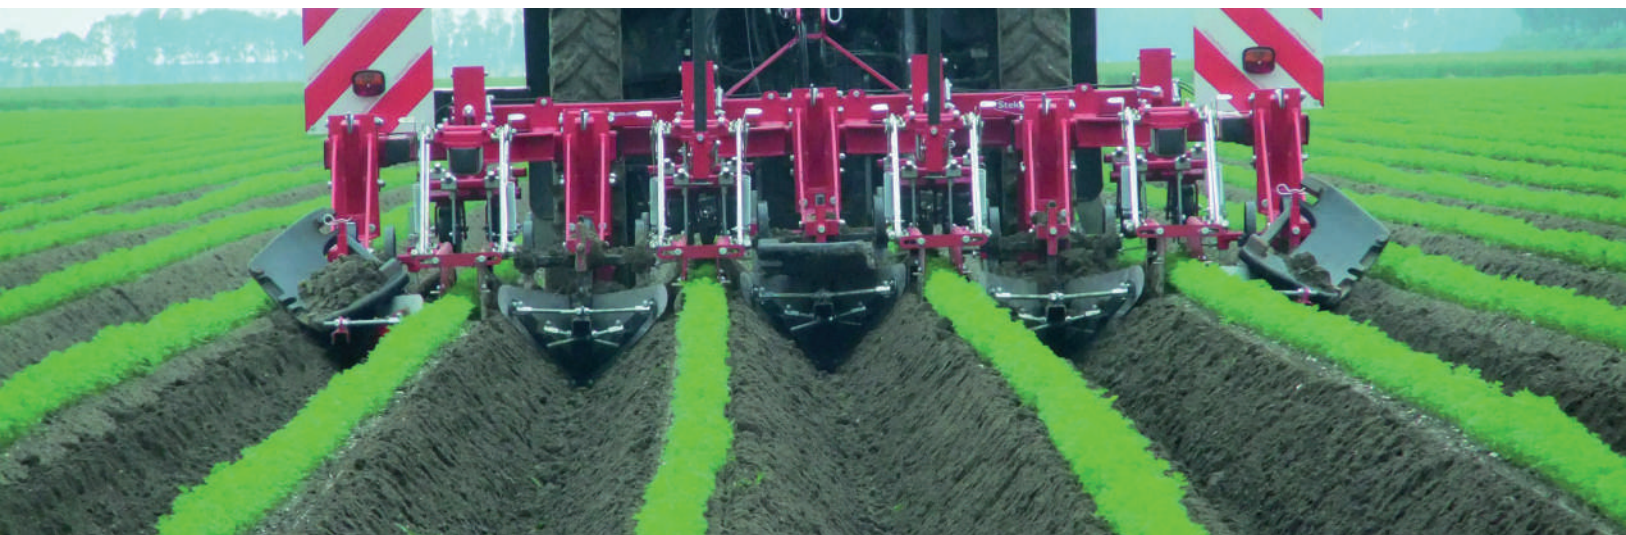



TA-285

RIDGER 

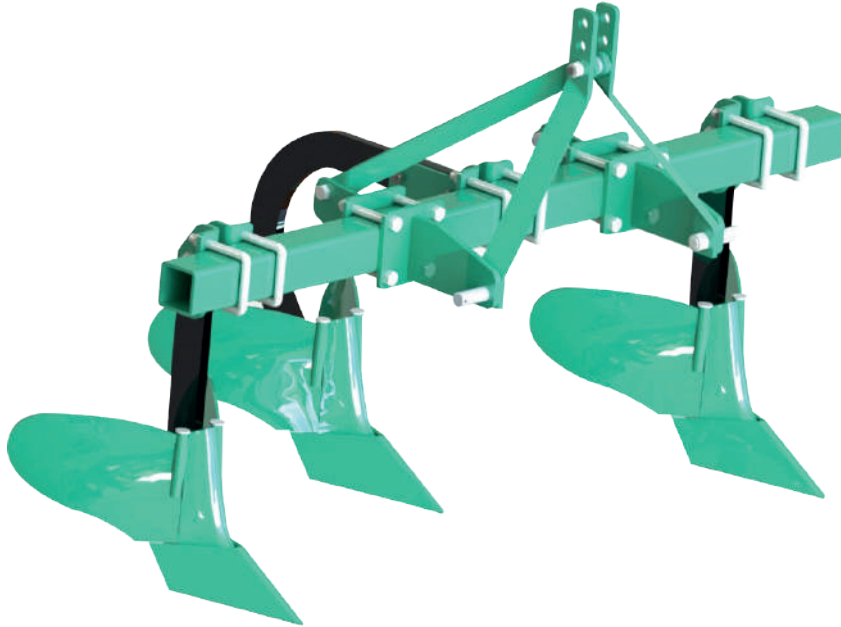

TECHNICAL SPECIFICATIONS

Model	TA-285-1	TA-285-2
Plough	3	4
Length (CM)	190	260
Weight (KG)	150	210
Foot Pcs (CM)	3	4
Foot Depth (CM)	20	20
2 Foot Between Distance (CM)	90	80
Tractor power (PH)	35-60	35-60





TEM TAR

Agricultural machinery



TRAILED LIGHT TYPE DISC HARROW WITH HYDRAULIC LIFT


TA-295



TECHNICAL SPECIFICATIONS


Model	TA-295-1	TA-295-2	TA-295-3	TA-295-4
Disc Quantity (Pcs)	28	32	36	40
Disc Diameter (Mm)	510X4	510X4	510X4	510X4
Working Width (Mm)	2550	2900	3240	3600
Weight (Kg)	1250	1370	1490	1600
Disc Space (Mm)	175	175	175	175
Bearing No	8	12	12	12
Necessary Power	60-75	70-80	80-90	90-100





TA-305

TRAILED & MOUNTED V TYPE GOBLE DISC HARROW



Diameter(mm)	Thickness
610	6
660	6
710	6



TECHNICAL SPECIFICATIONS

Model	TA-305-1	TA-305-2	TA-305-3	TA-305-4	TA-305-5
Disc Quantity	16	18	20	22	24
Disc Diameter (mm)	610X4	610X4	610X4	610X4	610X4
Working Width (mm)	1840	2070	2330	2530	2760
Weight (kg)	800	1004	1058	1108	1230
Disc Space (mm)	220	220	220	220	220
Bearing No	4	4	6	6	8
Necessary Power (hp)	65-75	80-85	90-95	100-105	110-115






TEM TAR

Agricultural machinery



FLAIL MULCHER


TA-315

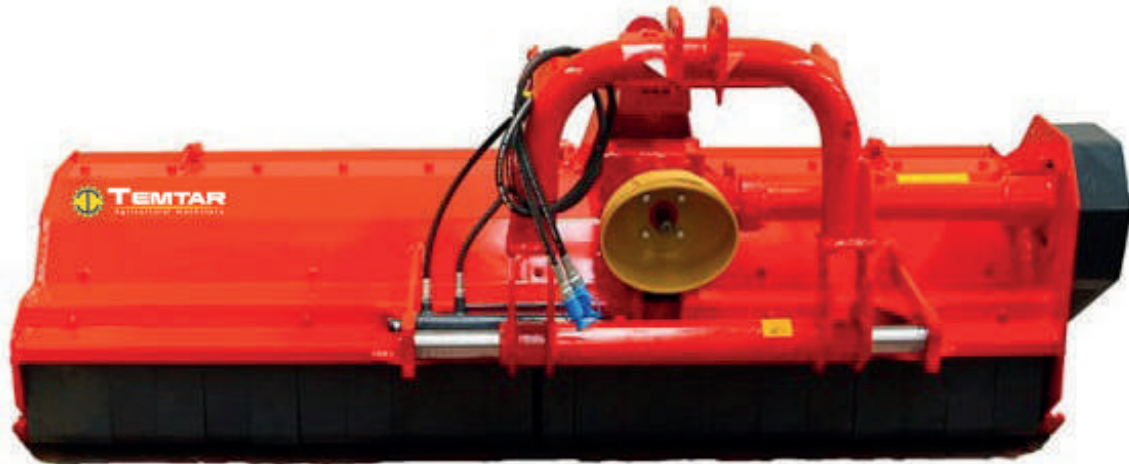

TECHNICAL SPECIFICATIONS


Model	TA-315-1	TA-315-2	TA-315-3	TA-315-4
Working Width (Mm)	1400 mm	1600 mm	1800 mm	2000 mm
Disc Quantity (Pcs)	14	16	18	20
Weight (Kg)	575	595	615 kg	635
Length	970 mm	970 mm	970 mm	970 mm
Width	1600 mm	1800 mm	2000 mm	2200 mm
Tractor Power	35-70 hp	40-70 hp	40-70 hp	50-70 hp





TA-325


CHISELS

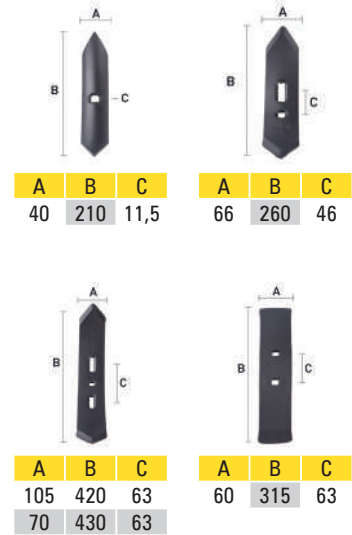

TECHNICAL SPECIFICATIONS

Model	TA-325-1	TA-325-2	TA-325-3	TA-325-4
Number Of Tines (pcs)	5	7	9	11
Working Width (cm)	128	191	235	289
Total Width (cm)	157	220	270	320
Length (cm)	110	110	110	120
Combined Roller Length (cm)	187	187	187	197
Total Height (cm)	133	133	133	133
Working Depth (cm)	68	68	68	68
Weight (kg)	400	450	560	700
Combined Roller weight (kg)	565	650	800	970
Required Power (hp)	60-70	70-80	80-90	90-100




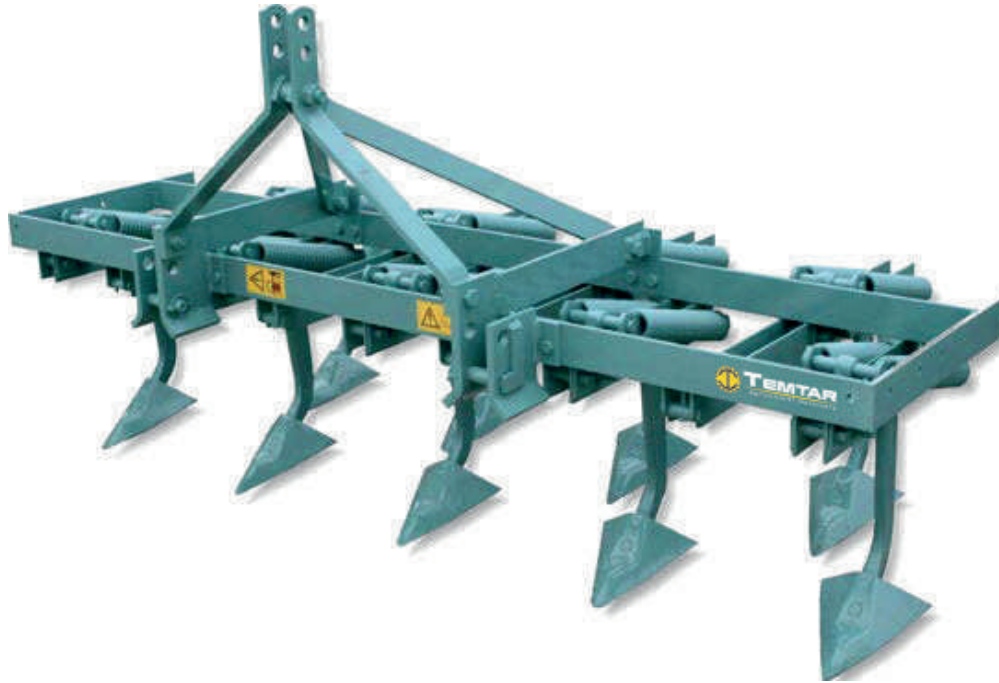

TECHNICAL SPECIFICATIONS


Model	TA-335-1	TA-335-2	TA-335-3	TA-335-4	TA-335-5
Number Of Tines (pcs)	7	9	11	13	15
Length (cm)	175	225	275	325	375
2 Foot Between Distance (cm)	54	54	54	54	54
Foot Length (cm)	46	46	46	46	46
Weight (kg)	260	320	420	470	520
Required Power (hp)	45-60	60-70	70-80	80-90	90-110






TA-345

CULTIVATOR

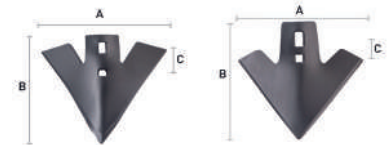

A	B	C	A	B	C
265	205	46	225	205	35
310	225	46	285	225	35

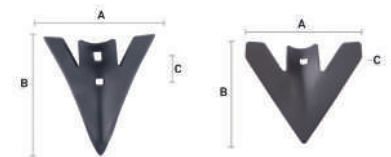

A	B	C	A	B	C
235	235	55	155	140	11
290	240	55			
290	270	48			

TECHNICAL SPECIFICATIONS

Model	TA-345-1	TA-345-2	TA-345-3	TA-345-4	TA-345-5
Number Of Tines (pcs)	5	7	9	11	13
Working Width (cm)	125	170	238	278	330
Combined Roller Length (cm)	187	187	187	187	187
Total Height (cm)	133	133	133	133	133
Working Depth (cm)	25	25	25	25	25
Weight (kg)	238	286	362	435	502
Required Power (hp)	30-40	40-50	50-80	80-100	80-110





TEMTAR

Agricultural machinery



AUTOMATIC BEANS AND CEREAL HARVESTER


TA-355



TECHNICAL SPECIFICATIONS


Working Capacity	1750 kg/hour
Daily Capacity	5-6 Hectare in 8 hours
Tank Capacity	700 Kg
Required Power	70 HP
Length	5700 mm
Width	2600 mm
Height	3100 mm
Weight	2800 Kg
Feeding Chamber	1200 mm
Number of Pathose Axes	54
Standard Sieve Diameter	28 mm (14-35 mm Optional)
Wheel Dimension	10.0/75-15,3





TA-365

BEANS DIGGER MACHINE

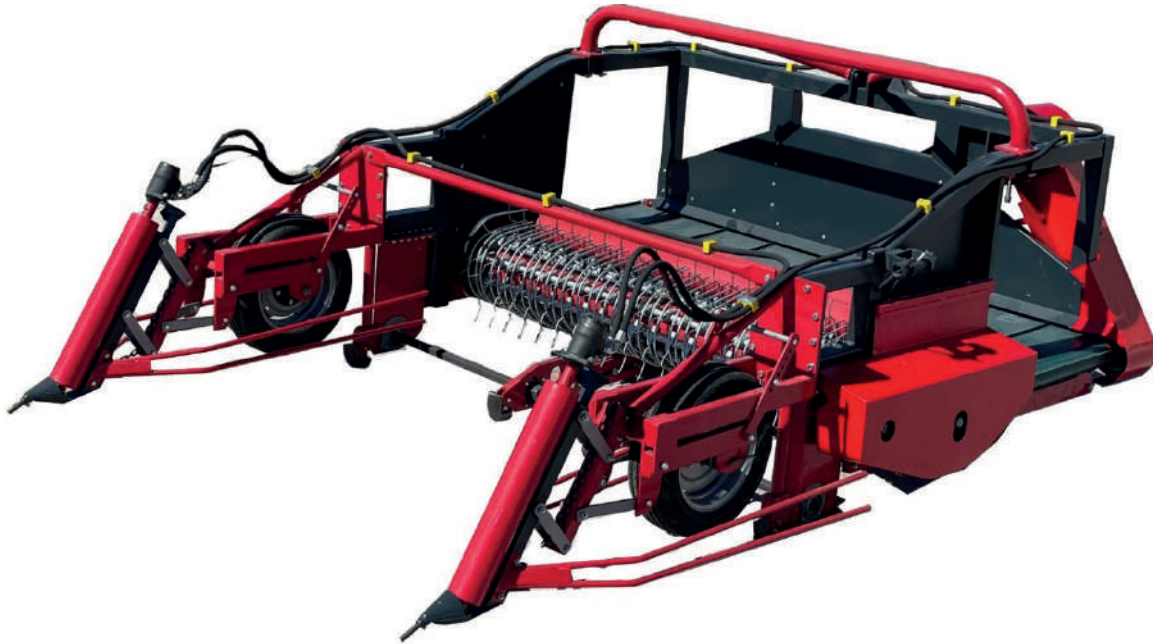

TECHNICAL SPECIFICATIONS

Working Width	2330 mm (5 lines x 45 cm sowing distance)
Daily Harvesting Capacity	6-8 Hectare (Depends on contiditions such as weather, humidity, crop frequency)
Width	2888 mm
Height	1569 mm
Number of Blades	3757 mm
Transport Width	2450 mm
Weight	1500 Kg
Required Power	85 HP (Dual Thrust)
Harvestable Legumes	Cranberry, Soybean, Navy, Pinto, Adzuki, Fava, Lima, Black, Lentil, Red Kidney, Split Pea, Garbenzo, Mung, Great Northern, Black-Eyed Peas, Anasazi, Cannelini






TECHNICAL SPECIFICATIONS



Model	TA-375
Lenght	4,100 mm
Width	2,050 mm
Height	2,350 mm
Wieght	1,450 kg
Beater Width	1,200 mm
Number Beater Of Blades	44
"Beater Sieve Diameters Diameters"	14-16-20 mm
Tier Size	600 X 16
Power Requirement (Min)	1200 rpm/min






TA-385

SILAGE MACHINE 

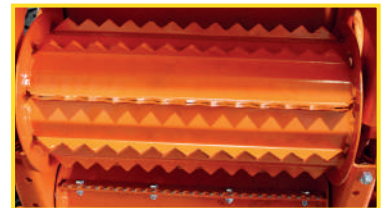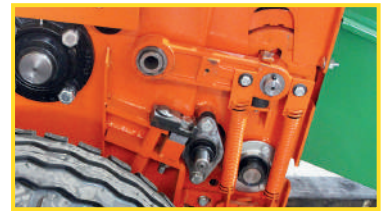


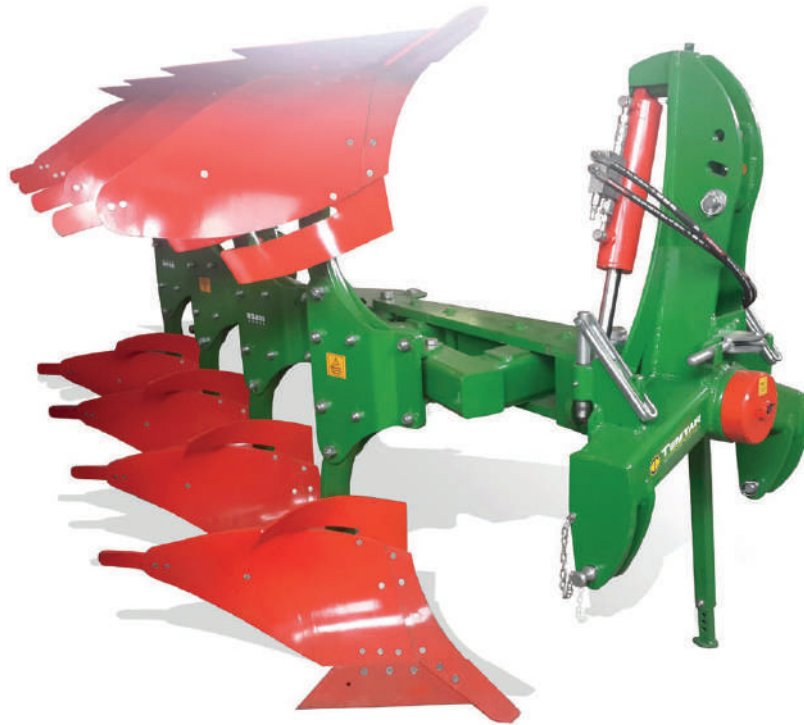

TECHNICAL SPECIFICATIONS

Model	Underbeam Clearance	Interbody Clearance	Working Width	Working Depth	Weight (Kg)			Power Requirement (Hp)		
					3	4	5	3	4	5
TYPE	(Cm)	(Cm)	(Cm)	(Cm)						
TA-395-1	75	85	90-120-160-200	40 (16')	945	1172	1370	60-100	70-120	90-140





TA-405

WEDGE PLOUGH (STANDART TYPE)



TECHNICAL SPECIFICATIONS

Model	TA-405-1	TA-405-2	TA-405-3
Size	28 (11')	32 (13')	36 (14')
Type	3	4	5
Working Width (Mm)	101	128	155
Working Depth (Cm)	38	38	38
Leg Space (Cm)	68	68	68
Chassis Height (Cm)	72	72	72
Weight (Kg)	384	512	665
Necessary Power	50-60	70-85	80-90






TECHNICAL SPECIFICATIONS

Model	TA-415-1	TA-415-2	TA-415-3	TA-415-4
Tank (lt)	400	500	600	800
Pump	TA-96	TA-96	TA-96	TA-96
Pressure	40	40	40	40
Spraying Handle (M)	10-12	10-12	10-12	10-12
Nozzle	20-26	20-26	20-26	20-26
Required Power (hp)	50-70	50-70	50-70	50-70
Eccentric Period	540	540	540	540





TA-425

GARDEN SPRAYER



1000
Lt.

2000
Lt.

TECHNICAL SPECIFICATIONS

Model	TA-425-1	TA-425-2
Tank (lt)	1000	2000
Pump	ES-96	ES-96
Pressure	40	40
Spraying Handle (M)	10-12-16	10-12-16
Nozzle	20-26	20-26
Required Power (hp)	50-70	50-70
Eccentric Period	540	540






TECHNICAL SPECIFICATIONS


Model	TA-435
Capacity (lt)	350
Work Width (m)	16-18
Height (mm)	1450
Width (mm)	1100
Length (mm)	1050
Machine Weight (Kg)	80
Leaf Spreader Piece	5
Propeller Piece	single





TA-445

FERTILIZER MACHINE

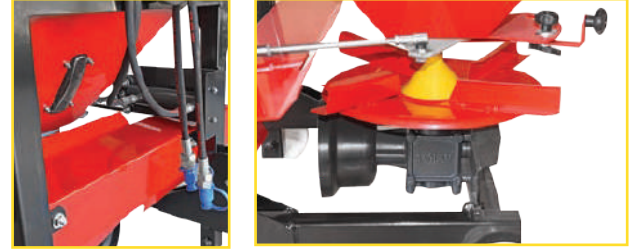

TECHNICAL SPECIFICATIONS

Model	TA-445-1	TA-445-2	TA-445-3	TA-445-4
Capacity (lt)	400	600	800	1000
Work Width (m)	16-20	16-20	16-20	16-20
Height (mm)	1108	1198	1290	1460
Width (mm)	1030	1120	1110	1100
Length (mm)	1140	1198	1650	1650
Machine Weight (Kg)	130	150	180	190
Stainless Steel Leaf	Opsiyonel	Opsiyonel	Opsiyonel	Opsiyonel
Stainless Steel Disc	Opsiyonel	Opsiyonel	Opsiyonel	Opsiyonel






TECHNICAL SPECIFICATIONS

Model	TA-455-1	TA-455-2
Capacity store (lt.)	800	1000
Working Width (m)	18-24	18-24
Height (mm)	1260	1260
Width (mm)	1150	1150
Length (mm)	1700	1800
Weight (kg)	225	230
Transmission Distance (cm)	50	50
Disc Type	Double	Double





TA-465


FERTILIZER MACHINE



TECHNICAL SPECIFICATIONS

Model	TA-465-1	TA-465-2
Capacity store (lt.)	1200	1500
Working Width (m)	18-24	18-24
Height (mm)	1220	1225
Width (mm)	1150	1150
Length (mm)	1800	1800
Weight (kg)	235	240
Transmission Distance (cm)	50	50
Disc Type	Double	Double




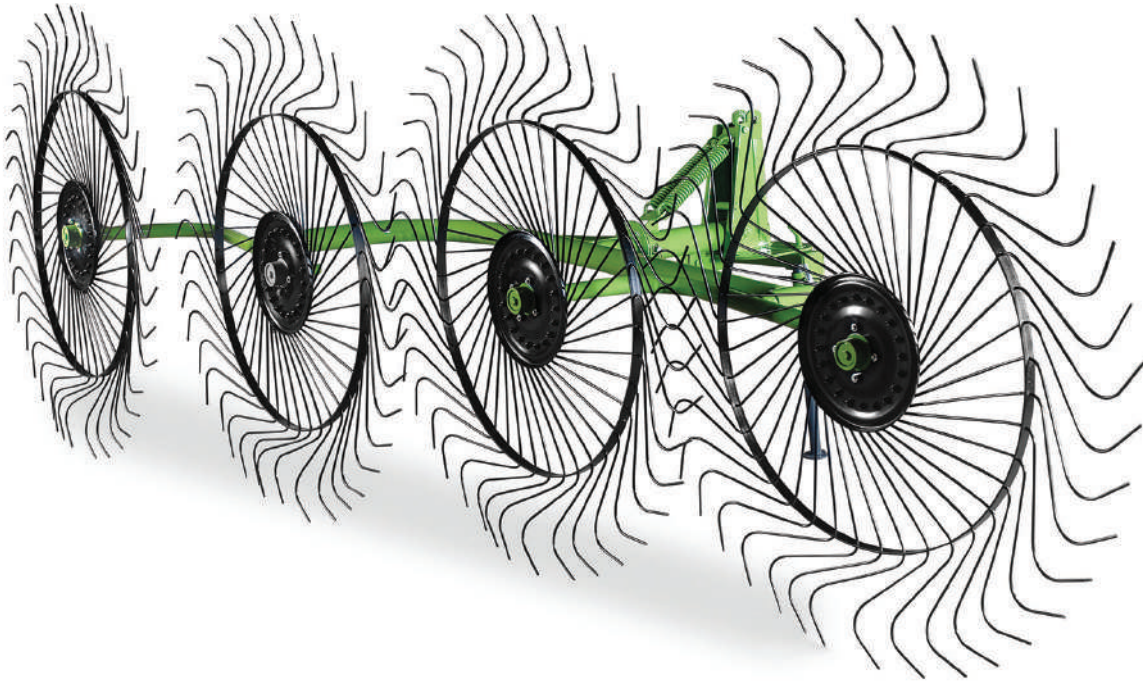

TECHNICAL SPECIFICATIONS

Model	TA-475-1	TA-475-2
Number Of Drum (pcs)	4	5
Total Length (mm)	4000	5300
Total Width (mm)	2100	2300
Working Width (mm)	2200-2600	3300-3500
Number Of Spring (pcs)	160	200
Total Weight (kg)	170	190
Required Power (hp)	30-50	30-90





TA-485

ROTARY RAKES



TECHNICAL SPECIFICATIONS


Model	TA-485-1	TA-485-2
Numbers Of Rotor Arm	9	11
Number Of Spring Arm	3	4
Working Width	3.3 m	4 m
Widht (Transport Position)	1.2 m	2 m
Number Of Tires	2	4
Basic Sizes Of Rubber Wheel	16/6,5-8	16/6,5-8
Height	1.24 m	1.28 m
Weight	400 Kg	604 Kg
Min Power Requirement	40-50 Hp	45-55 Hp
Pto Speed	540 Rpm	540 Rpm
Lenght (Transport Position)	2.68 m	2.89 m






TEMPTAR

Agricultural machinery

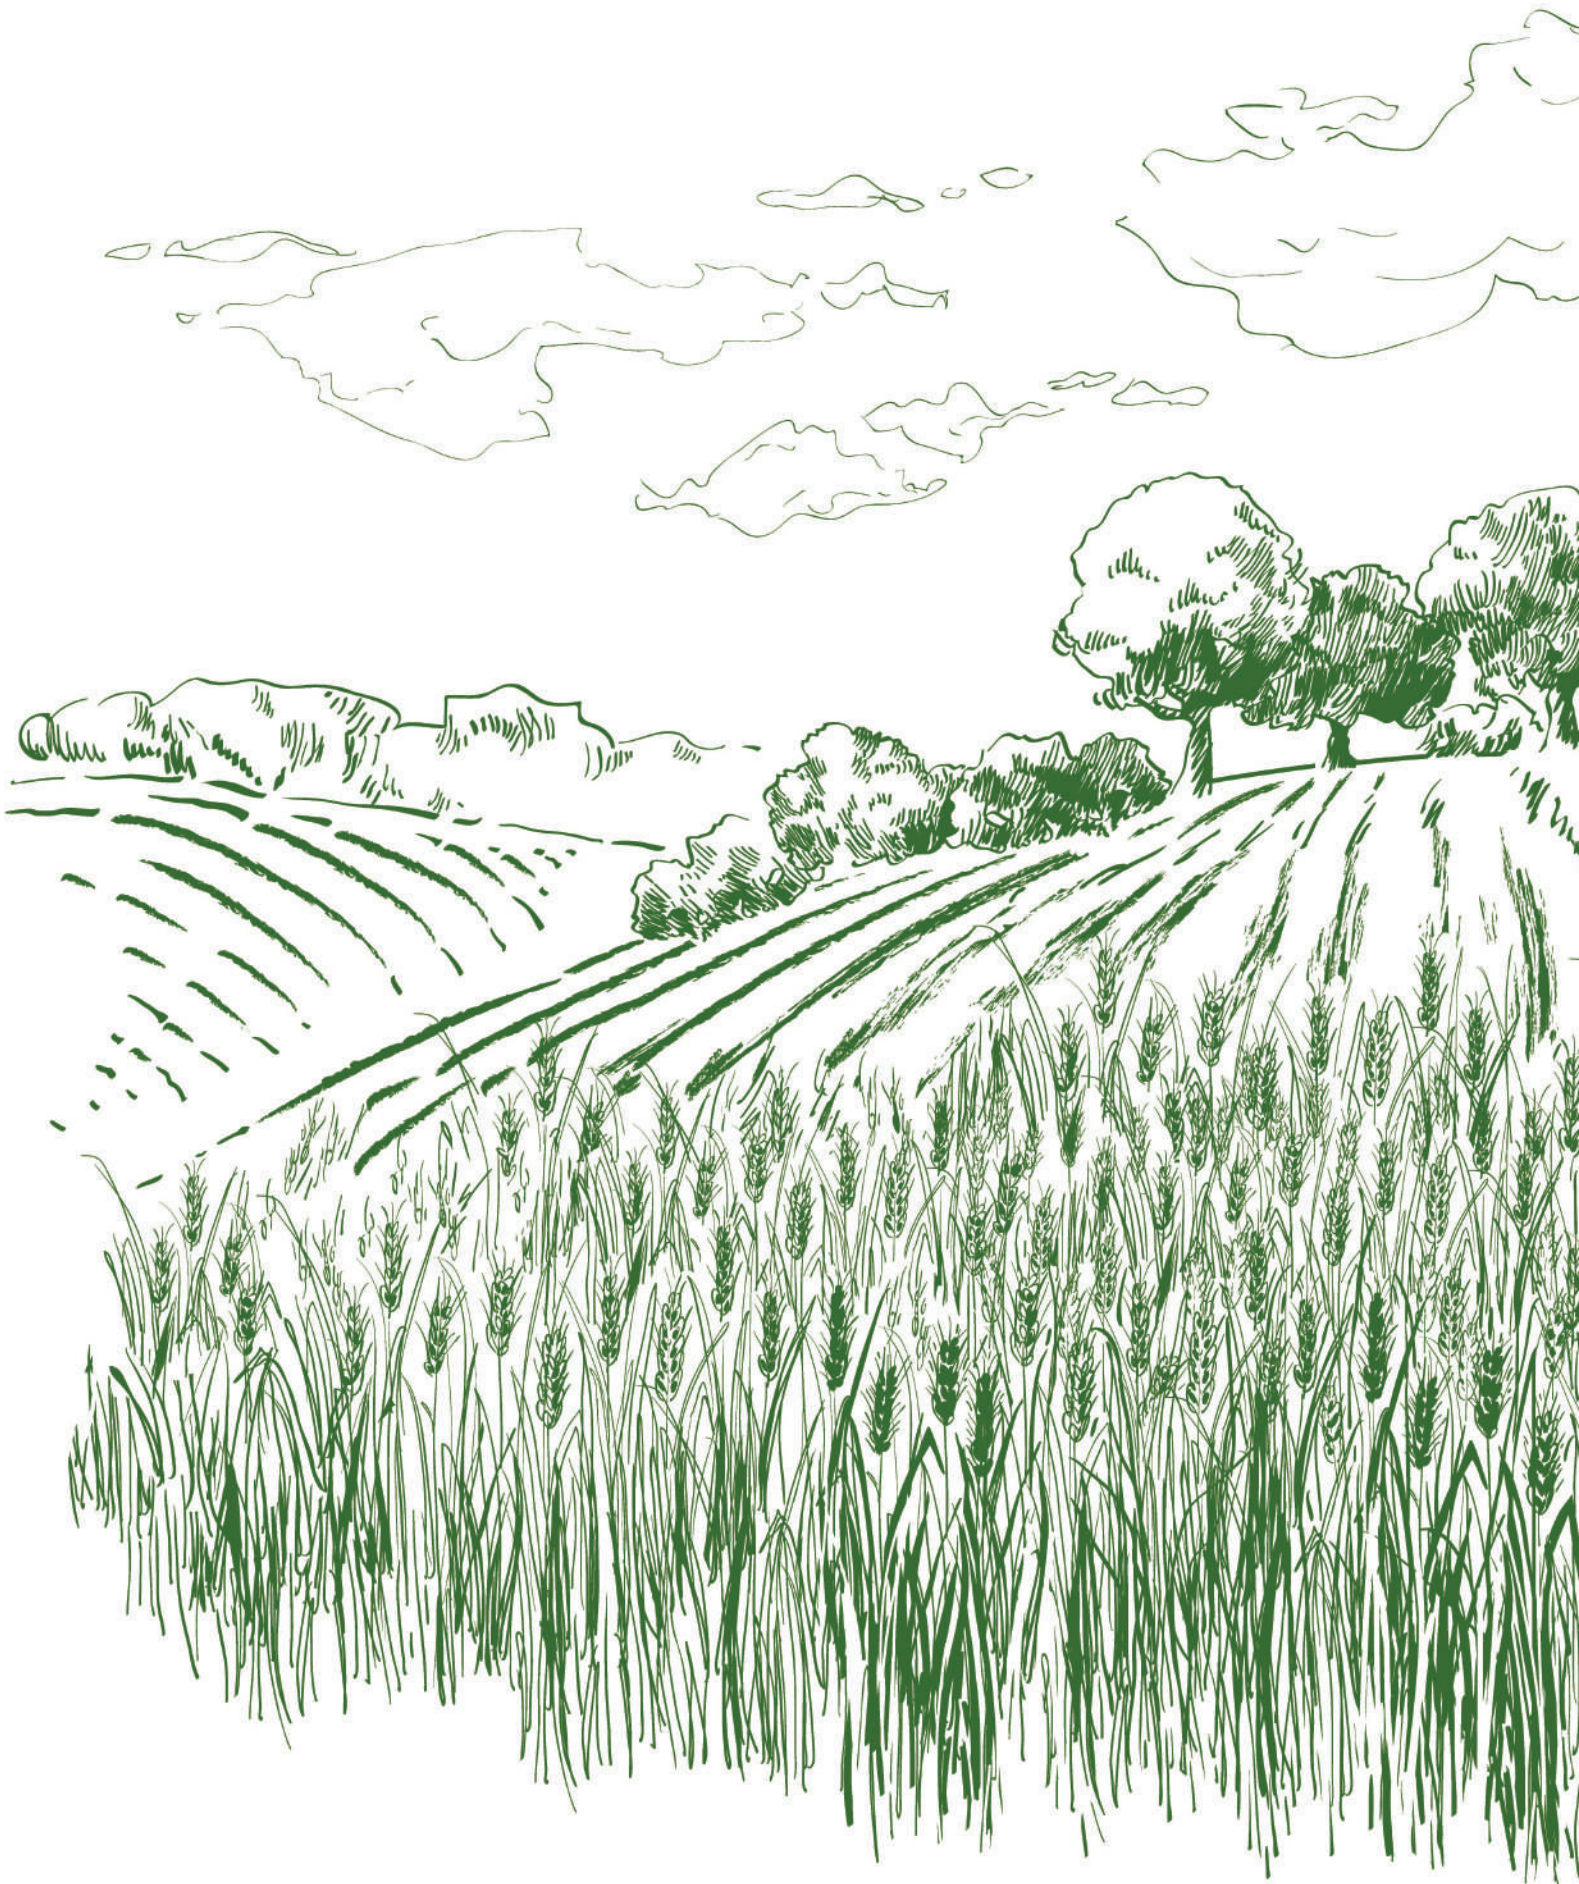







TEMTAR
Agricultural machinery



Area with horizontal dotted lines for writing.



A series of horizontal dotted lines for writing.



TEMTAR

Agricultural machinery

TEMTAR AGRICULTURAL MACHINERY

Fevzi Çakmak Mah. Milenyum Cad.
No:17/J Karatay / KONYA / TÜRKİYE

Tel : +90 332 233 55 43

Fax : +90 332 233 12 72

www.temtaragri.com

info@temtar.com

VERSION : 23-10

TEMTAR GROUP



divayn
tasarım